

LOEWE OPTA **rundfunk service**

R 10-51231

R 11-51232


R 104-51233

R 106-52234 (233) 47090

R 108-52236

R 178-51234

R 180-51235

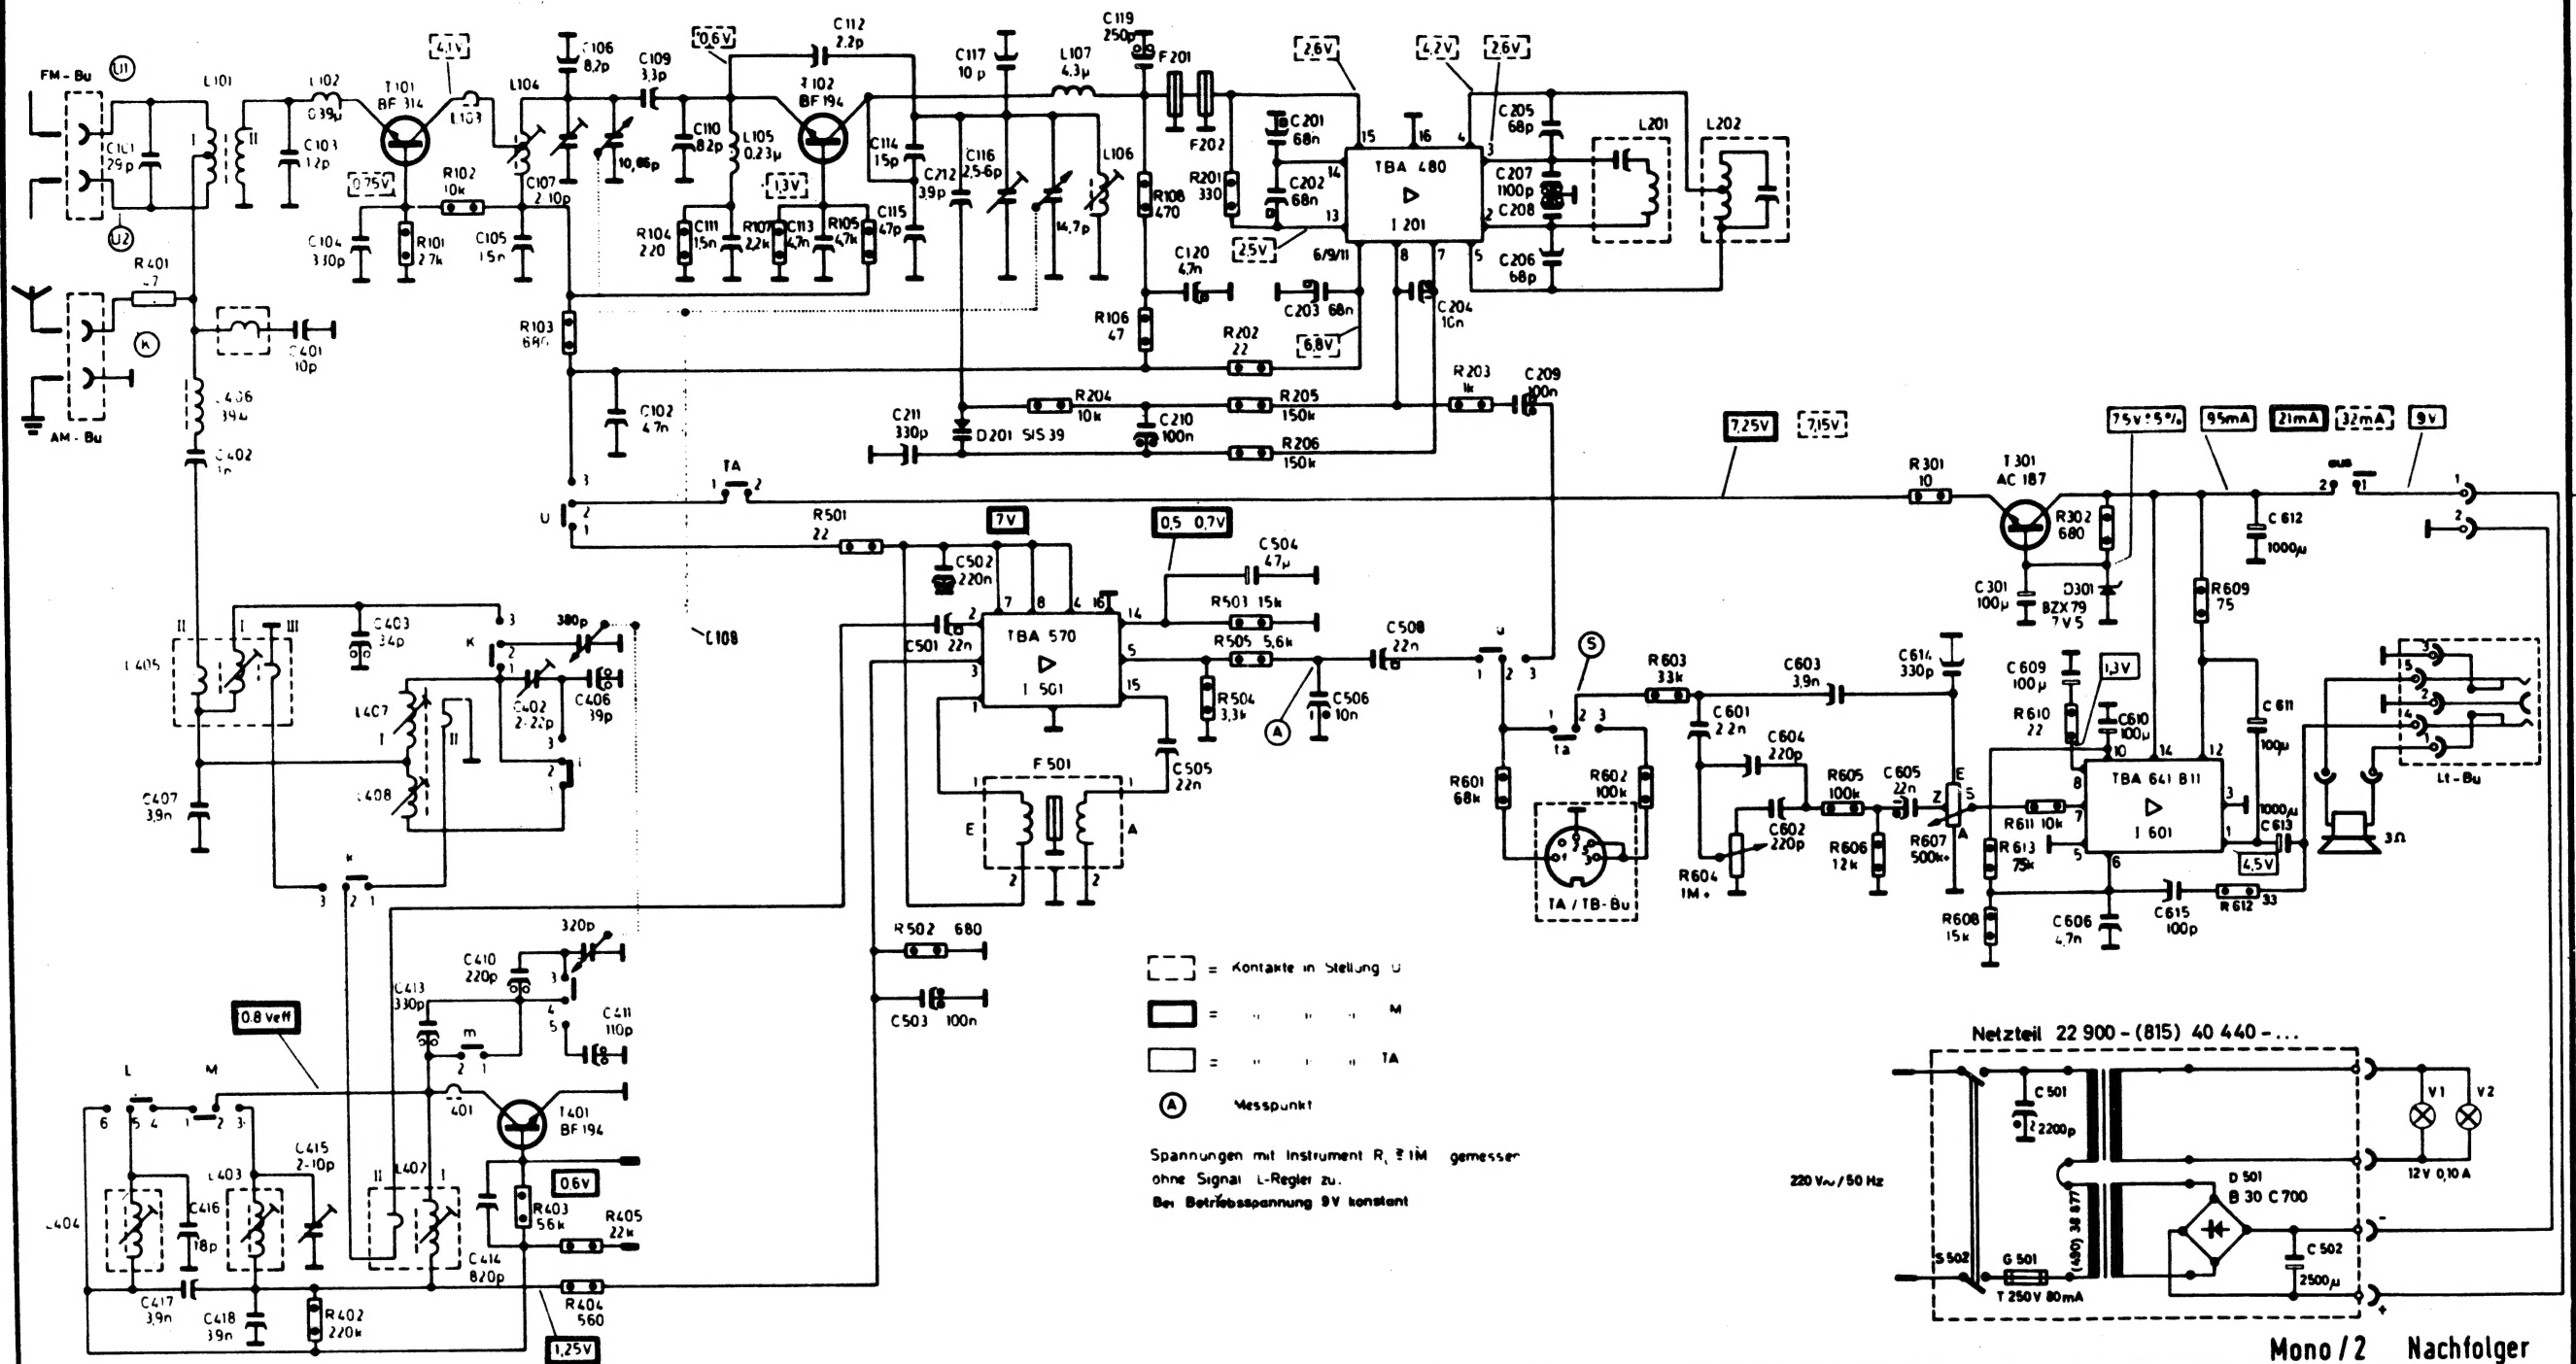

Mono 2 Nachfolger

		Bereich		Osz	Zw-Kr	Vorkr	Abgl-Freq	ZF	L101 12x1/0,3 CuL 17/0,3 CuL L102 0,39 µH L103 Ferritperle L104 3 4/5 Cu Ag L105 0,23 µH L106 2 3/5 Cu Ag L107 4,3 µH L201 15 1/2 0,09 CuL L202 21 0,1 CuL L401 Ferritperle L402 1109 1/4 0,07 CuL L403 109 1/4 0,08 CuL L404 9 1/2 0,12 CuL L405 1 9 1/2 0,1 CuL L406 39 µH L407 167/0,2 CuLs L408 60/4x0,05 CuLs	
U	875-104 MHz	875-103,8 MHz	L106	L104	—	—	88,3 MHz	10,7 MHz	L406 39 µH L407 167/0,2 CuLs L408 60/4x0,05 CuLs	
L	147-350 KHz	150-343 KHz	L402	—	—	—	160 KHz	460 KHz		
M	513-1620 KHz	516 1605 KHz	L403	—	—	—	580 KHz	—		
K	585-15,6 KHz	59-15,5 KHz	L404	—	—	—	6,5 MHz	—		

U, L, M, K: LWSZ/0,1Vr zuerst abgleichen

Anschlüsse von oben gesehen:

- TBA 480/570
- TBA 641
- S15 39
- BZX79 7V5

FM-Bu AM-Bu LI-Bu Dioden-Bu